


XFENCE LIVESTOCK SPECIFICATION SHEET

An unobtrusive smooth surface X knot greatly reduces the risk of fleece removal or hide damage, this is the most common mesh pattern used in the UK, ideal for most types of livestock.


- 24% stronger Knot
- Manufactured to BS EN 10223-5
- Exceeds BS EN 10244 Class A
- Wire produced to BS 4102

BENEFITS

- Superior alu/zinc coated wire, lasts 3-4 longer than galvanised wire
- 450mm pre-stripped ends more than most
- Premium primary wires only used in Xfence fabricated netting
- Consistent superior high tensile strength wires only
- Greater rigidity due to the one-piece vertical wires
- Smoother and safer non-abrasive forged X knot
- Proven in the field since its conception in 2007
- Easier to install, almost self-supporting
- Save on both labour and posts
- Longer maintenance free life
- Guaranteed to last
- Made in New Zealand by the specialists in high tensile fencing
- Distributed nationally by the UK's leading fencing supplier

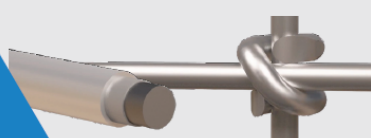


- Manufactured from highest quality primary metals
- 95% Zinc 5% Aluminium
- XTRALIFE coating 24% stronger knot
- Smooth animal friendly abrasive free design forged X knot



- Tension curves absorb any pressure from climatic change or livestock pressure. Reduce by 50% for visible tensioning
- 450mm Pre-stripped ends, speeds up tying off time




- One piece uncut vertical wire
- Acts like its own intermediate, provides real strength & rigidity to the fence, almost self supporting
- Makes installation quicker



- Xtralife coating makes the wire more ductile, easier to work
- Resists cracking when tying off, unlike some heavy galvanised wire

Real return on your investment, not all wire is the same, why gamble?

For more information contact:
Graham Mitchell – 07842 428289
Walter Bailey (Par) Ltd, St. Andrews Road, Par, PL24 2LX

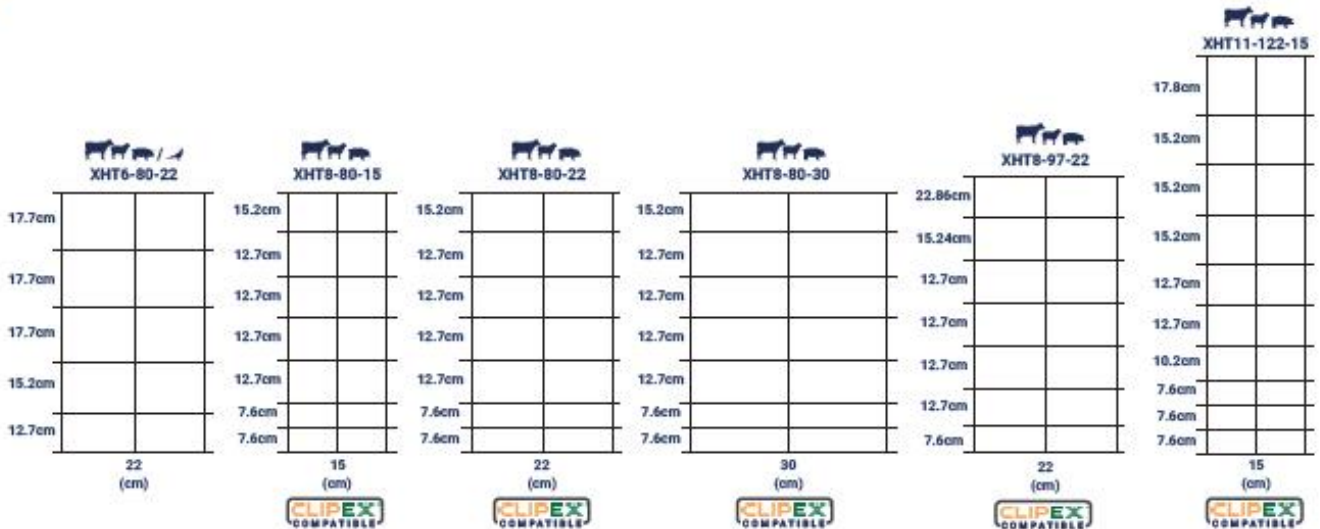

Specification	Horizontal Wires	Vertical Spacings (cm)	Height (cm)	Roll Lengths (m)	Code
XHT6-80-22	6	22	80	100m	F2424
				300m	F2425
XHT8-80-15	8	15	80	100m	F2412
				300m	F2414
XHT8-80-22	8	22	80	100m	F2415
				300m	F2419
				500m	F2422
XHT8-80-30	8	30	80	100m	F2416
				300m	F2418
				500m	F2417
XHT8-97-22	8	22	97	100m	F2240
XHT8-97-22	8	22	97	300m	F2421
XHT11-122-15	11	15	122	100m	F2405





XFENCE

SPECIFICATION SHEET

X fence fabricated fencing systems are world renowned for their durability and market leading quality. Made in Christchurch, New Zealand by leading manufacturer EuroSteel, using only the highest quality raw materials in their state-of-the-art production facility, XFence has been tried and proven in the harshest conditions and most testing applications worldwide.

- Stronger wire
- Premium coating
- Easier installation
- Longer maintenance free life



A wide variety of mesh patterns stocked to suit all livestock types.



What separates XFence from the rest?

- XFENCE is the original X knot stiffstay product
- Only primary metal used, which means you get consistent tensile strength every time
- Every roll comes with 450mm pre-stripped ends, which make tying off easier and quicker
- Alu/zinc coated which gives 3-4 times longer life than heavy galvanised products
- The alu/zinc coating also makes the wire more ductile, easier to work with and won't crack when tying off, which can happen with some heavy galvanised products
- X fence have years of experience in producing a premium product, having this knowledge has enabled them to apply the correct pressure on the knots which reduces the wire snapping at the knots when tying off which can happen with similar products
- Guaranteed meterage
- Higher tensile strength than some cheaper heavy galvanised products helps retain tension over the life of the fence
- Non abrasive knot, prevents hide damage
- The British Standard BSEN 10244-2 coating lists a sacrificial zinc coat of 230 grm-2, X fence exceeds these standards with a Alu/Zinc alloy coating which offers an extended life protection
- X fence exceeds European Standards for strength and galvanisation and is manufactured to BSEN 10223-5



- Manufactured from highest quality primary metals
- 95% Zinc 5% Aluminium
- XTRALIFE coating 24% stronger knot
- Smooth animal friendly abrasive free design forged X knot



- Tension curves absorb any pressure from climatic change or livestock pressure. Reduce by 50% for visible tensioning
- 450mm Pre-stripped ends, speeds up tying off time



- One piece uncut vertical wire
- Acts like its own intermediate, provides real strength & rigidity to the fence, almost self supporting
- Makes installation quicker



XTRALIFE Heavy Galv

- Xtralife coating makes the wire more ductile, easier to work
- Resists cracking when tying off, unlike some heavy galvanised wire

Full X fence range stocked

CLIPEX

CODE	PATTERN	TENSILE	KNOT
F2412	XHT 8 - 80 - 15 Stock Fence	HT	X knot
F2415	XHT 8 - 80 - 22 Lamb Fence	HT	X knot
F2416	XHT 8 - 80 - 30 Stock Fence	HT	X knot
F2405	XHT 11 - 122 - 15 Cattle/Railway	HT	X knot
F24065	XHT 11 - 122 - 7.5 Horse/Poultry	HT	X knot
F2440	XHT 13 - 190 - 15 Deer Fence	HT	X knot
F2441	XLHT 13 - 190 - 15 Deer Fence (light)	LHT	X knot
F2448	XLHT 13 - 190 - 7.5 Poultry/ Dogs/Deer (light)	LHT	X knot
F2450	XHT 13 - 190 - 7.5 Boar/Poultry/Badger	HT	X knot

CODE	PATTERN	TENSILE	KNOT
F2400	XHT 10 - 90 - 7.5 Horse	HT	X knot
F2402	XHT 12 - 110 - 7.5 Horse	HT	X knot
F2404	XHT 13 - 125 - 7.5 Horse	HT	X knot
F2408	XHT 13 - 125 - 5 Foal//Horse	LHT	X knot
F2410	XHT 15 - 158 - 7.5 Badger	LHT	X knot
F2424	XHT 6 - 80 - 22 Game Bird Fence	HT	X knot
F2456	XHT 19 - 180 - 5 Security/Tree Guards	HT	X knot
F2454	XHT 17 - 190 - 7.5 Badger/Boar/Deer	HT	X knot
F2427	XLHT 6 - 50 - 5 Apron fence/Otter/Poultry (light)	LHT	X knot
F2462	XLHT 23 - 220 - 5 Hinged Apron Otter Fence	LHT	X knot

Wire Specification, coating and tensile strengths

TYPE	NOMINAL - HORIZONTAL WIRES	VERTICAL WIRES	COATING
XLHT - X Knot High Tensile	2.0mm - 1235/1550 (N/mm ²)	2.0mm - 850/950 (N/mm ²)	Alu/Zinc
XHT - X Knot High Tensile	2.5mm - 1235/1550 (N/mm ²)	2.5mm - 850/950 (N/mm ²)	Alu/Zinc